
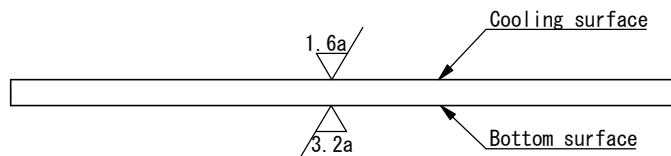
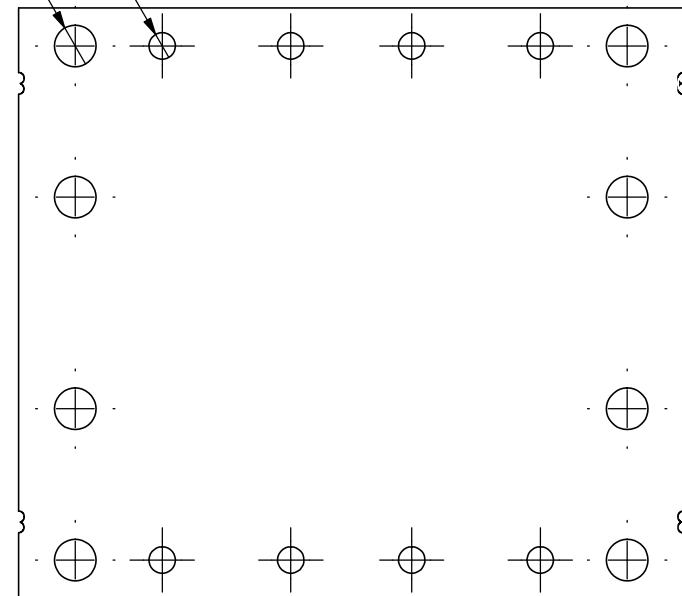
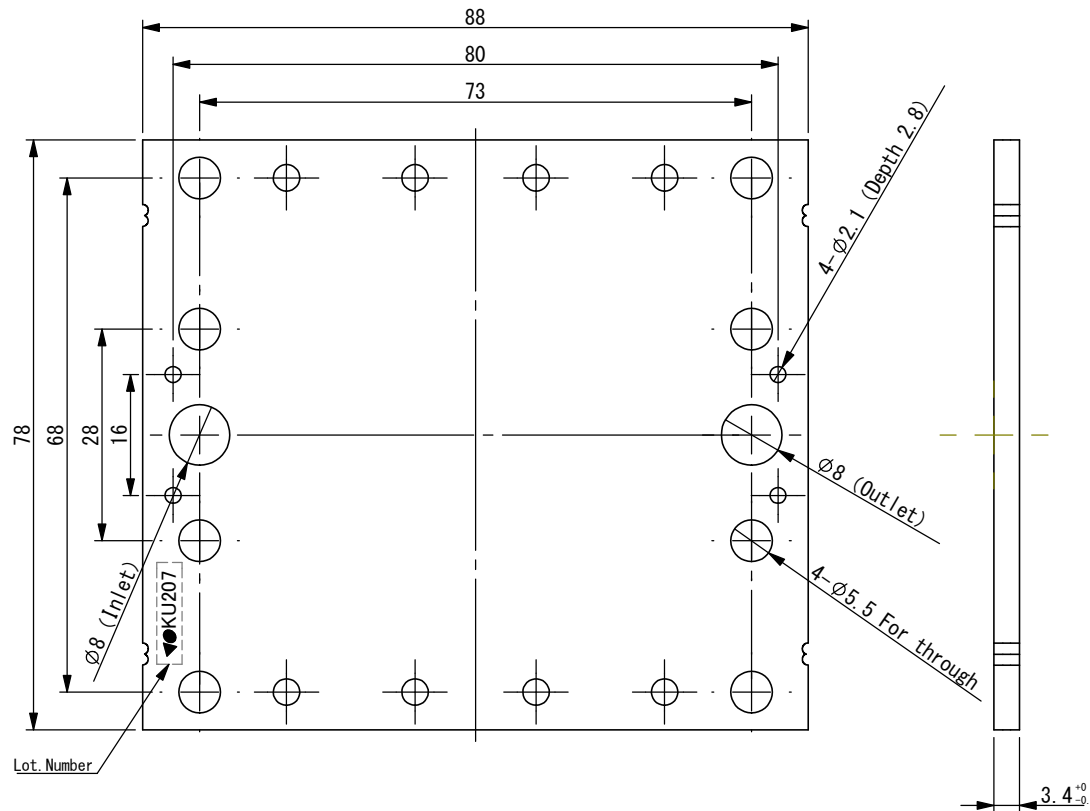


Product Name	Thin Multi-Layer Liquid Cold Plate
Model number	HS-C78-88-3.4t-MLO
Inquiry phone number	Osaka CMB Sales office +81-6-6532-1301
 Kawaso Texcel Corporation	

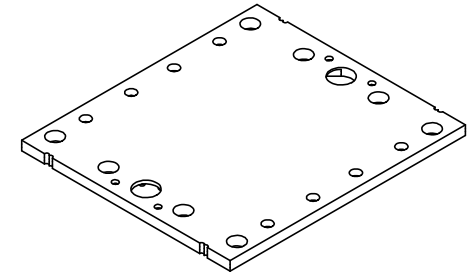

Specifications

1. Material: Oxygen-free copper (C1020)
2. Weight: Approximately 161g
3. Recommended flow rate: 0.5 to 4L/min
4. Thermal resistance at recommended flow rate: 0.04 to 0.015 °C/W
(reference value ※It fluctuates depending on the heat generation area)
5. Pressure loss at the time of recommended flow rate: 0.005 to 0.075MPa (reference value)
6. Flatness of the cooling surface: 0.05mm or less

Handling Precautions

- ※Pure water or antifreeze containing corrosion inhibitor is recommended for coolant.
- ※Even when pure water is used, it is recommended to install an ion exchange unit to prevent ion concentration increase in circulating water.
- ※Because city water and industrial water may corrode copper, please refrain from using.
- ※The Inlet side is the side with lot No. mark.
- ※Please handle with care due to the body is thin and easily deformable.
- ※Please note that dimension and specifications may be changed without prior notice.