


Model Name	Copper Liquid Gold Plate
Model No.	HS-C170P
Contact	osaka-sales@kawaso-texcel.co.jp KoeIn-sales@kawaso-texcel.de (in Europe)
	Kawaso Texcel CO., Ltd.

SUS tubes are used for Inlet/Outlet only,
not use for water channel inside.
(Applicable fitting Outer Diameter $\phi 8$)

ver. 1. 0. 0

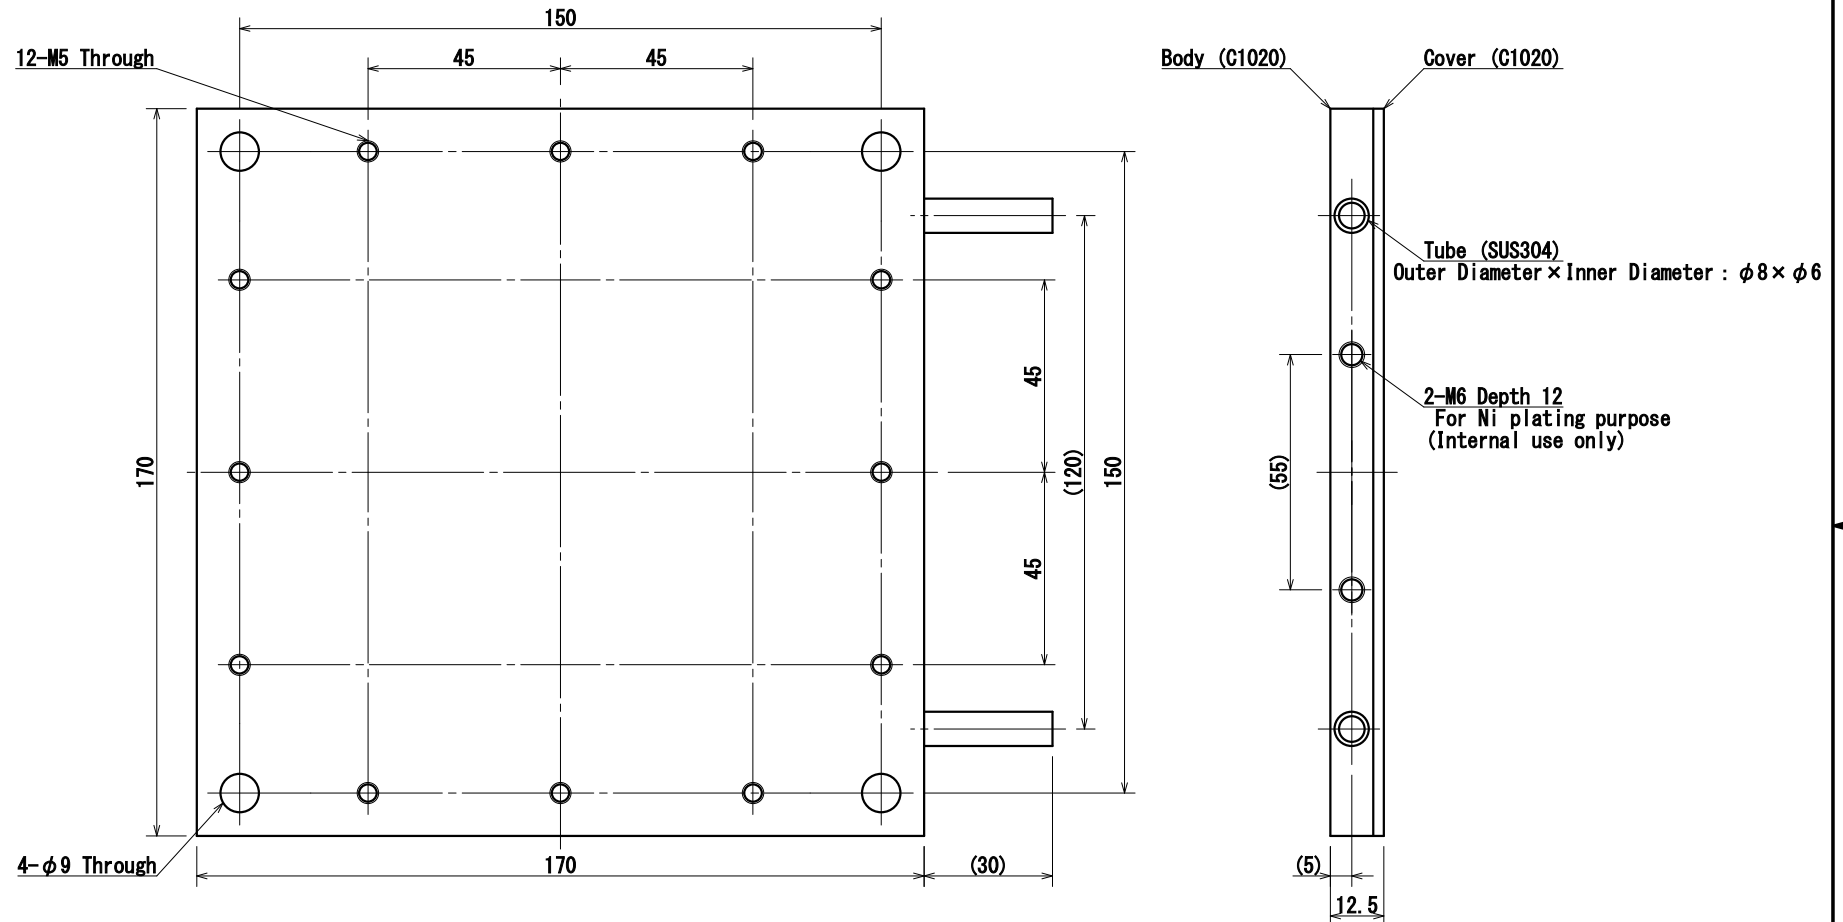

Specifications

- ※There are processing marks on the cooling surface.
- ※In order to ensure heat sink performance, surface flatness and parallelism of the product is set to 0.02 mm or less.
- ※There is a step (about 0.5 to 1.0 mm) at the joint between the body and the cover. However, the cover does not go outward from the body.
- ※Performed matt Ni plating (2 μm) on the whole as base plating. When machining inside the tapped holes, inside the holes may be non-plated.
- ※Commercial bolts (JIS B 0209-1 fitting classification: middle) pass through the threaded section.

Handling Precautions

- ※Even when pure water is used, it is recommended to install an ion exchange unit to prevent ion concentration increase in circulating water.
- ※Pure water or antifreeze containing corrosion inhibitor is recommended for coolant.
- ※Because city water and industrial water may corrode copper, please refrain from using.
- ※When attaching the tube to the fitting connection, please fix it with a tool so that no force is applied to the joint between the fitting connection and copper.
- ※Please note that dimensions and specifications may be changed without prior notice.